



105 SERIES



LED



10512 | FLUSH MOUNT



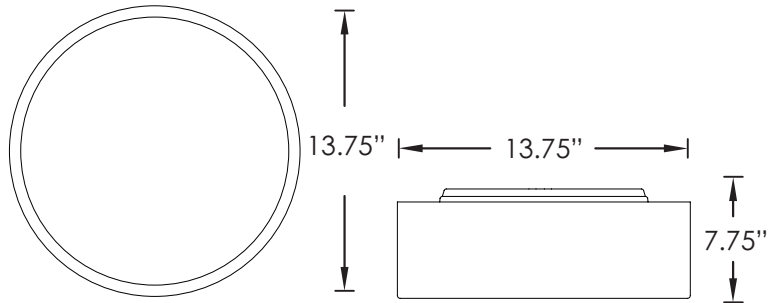
10512-PEN | PENDANT



10512-CBL | CABLE



STANDARD SPECIFICATIONS

Housing	Durable Steel Pan
Trim	Brushed Nickel Finished Steel
Lens	Decorative Frosted Translucent Acrylic
Certification	Damp Location
Mounting	Ceiling Mount Only



REPLACEMENT PARTS

LENS-1051 | White Frosted Translucent Acrylic

PRODUCT FAMILY	LENS TYPE	FINISH	MODEL	FEATURES & OPTIONS*
105	1	2		
	1 - White Frosted Translucent Acrylic	2 - Brushed Nickel 	14LED-120	120V, 50/60Hz Electronic, 0-10 Dimmable 1.4 Watts, 1350 Lumens, >80CRI Options: 30K, 40K, CBL, PEN
			23LED-120	120V, 50/60Hz Electronic, 0-10 Dimmable 23 Watts, 1850 Lumens, >80CRI Options: 30K, 40K, CBL, PEN
			2X9LEDA19	120V, 60Hz Electronic, Non-Dimmable 19 Watts, 1600 Lumens, E26 Base Options: 30K, 40K, 50K, 65K, CBL, PEN
			INC	2x40 Watt Max Incandescent 2x9 Watt Max LED Options: CBL, PEN

OPTION LEGEND

30K	3000 Kelvin Warm White Light Temperature
40K	4000 Kelvin Cool White Light Temperature
50K	5000 Kelvin Daylight White Light Temperature
65K	6500 Kelvin Full Spectrum Light Temperature
CBL	36" Max. Cable Mounting Kit
PEN	6"/13" Pendant Lighting Kit

* May not be available in all wattages or combinations, please call factory.