



INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS



Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.



Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

1

OUTLET BOX MOUNT

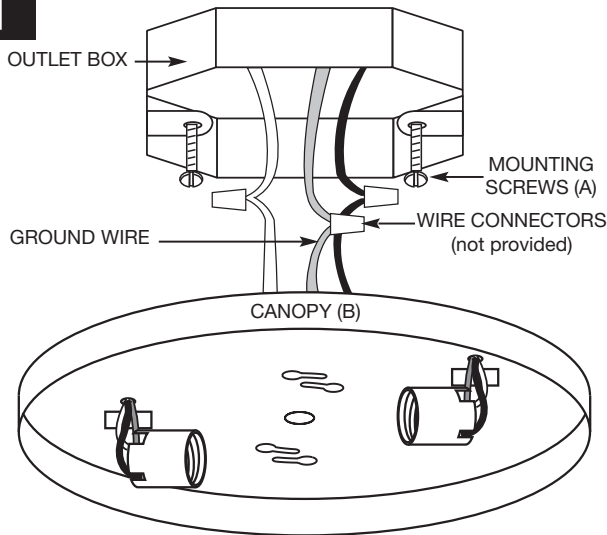

Thread 1" long mounting screws (A) into outlet box. Be sure to leave enough of the screw extended to allow the attachment of the canopy (B).


A. Take black fixture wire(s) and place evenly against the black wire from the outlet box. **Do Not** twist wires together before using wire connectors. Fit a wire connector over the wires and thread the connector clockwise until you feel a firm resistance.

B. Take white fixture wire(s) and place evenly against the white wire from the outlet box. **Do Not** twist wires together before using wire connectors. Fit a wire connector over the wires and thread the connector clockwise until you feel a firm resistance.

C. Take bare fixture ground wire and place evenly against the ground wire from the outlet box. **Do Not** twist wires together before using wire connectors. Fit a wire connector over the wires and thread the connector clockwise until you feel a firm resistance.

D. Screw lamp into lampholder. Use lamp type and wattage specified on fixture.

2

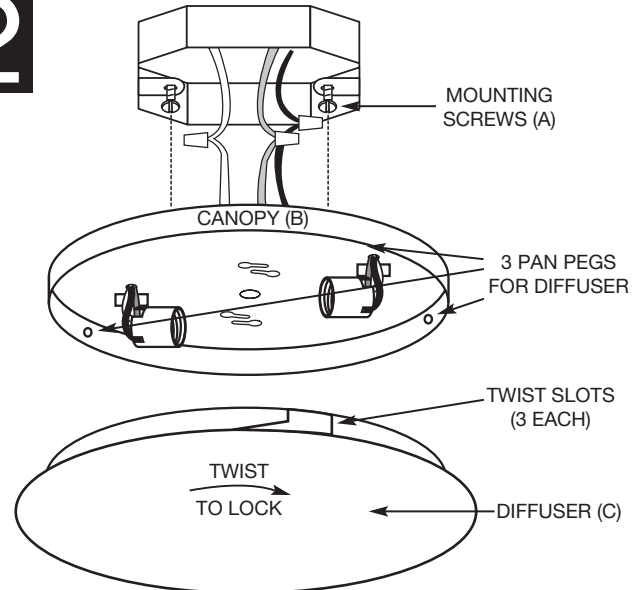


Make sure no bare wires can be seen outside wire connectors.

After the wires are connected, carefully tuck them into the outlet box. Position canopy (B) to outlet box and secure with mounting screws (A). Select appropriate keyhole slots.

FOR MODELS WITH TWIST LOCK DIFFUSER, SEE ABOVE
Attach diffuser (C) by aligning slots with pegs on canopy (B) and pushing the diffuser upward and rotating clockwise.

FOR MODELS WITH RETAINING SCREWS, SEE BELOW

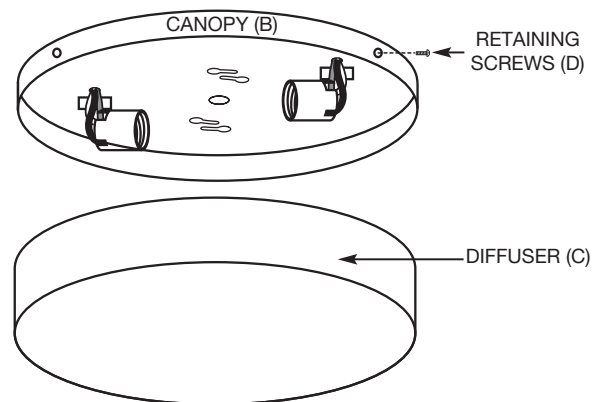

Attach diffuser (C) and secure in place with diffuser retaining screws (D).



CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE LUMINAIRE.