

COMMERCIAL LED RECESS DOWN LIGHT



FEATURES

- Multiple sizes: 4/6/8/9.5 inch
- 15 in 1 (5 CCT and 3 wattages selectable).
- High luminous efficacy, up to 110LM/W.
- High quality Aluminium shell with frosted PC diffuser.
- 0-10V Dimmable.
- Suitable for damp locations.
- IC Rated and airtight rated.



SPECIFICATIONS

CONSTRUCTION

- High quality white aluminum housing

OPTICS

- PC diffuser
- SDCM < 4
- CCT : 2700K-3000K-3500K-4000K-5000K
- 120° Beam angle
- 90 CRI

ELECTRICAL

- 0-10V Dimming
- 20AC Input
- PF:>0.9,THD:<20%

WARRANTY

- 5 Years

INSTALLATION

- Recessed

CERTIFICATIONS


- ETL Listed for Damp Locations
- Energy Star
- -20°C to 35°C (-4°F to 95°F)
- RoHS, FCC



Intertek



DIMENSIONS

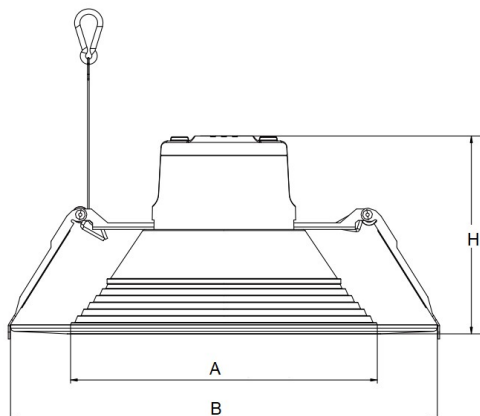

Size	A	BxH
4" Circular	4.33"	5.91"x4.02"
6" Circular	5.91"	8.27"x4.41"
8" Circular	7.48"	10.24"x4.76"
9.5" Circular	8.27"	11.22"x4.76"

ORDERING GUIDE

Example: (120CRD-4)

PRODUCT SERIES	SIZE
120CRD	4= 4" Circular
	6= 6" Circular
	8= 8" Circular
	10= 9.5" Circular

PARAMETERS

MODEL NUMBER	SIZE	VOLTAGE (V)	WATTAGE (W)	EFFICACY (LPW)	LUMEN (LM)	CCT (K)	WEIGHT (lbs)
120CRD-4	4=4" Circular	120-277V	9/13/18	110	1000/1500/2000	2700K- 3000K- 3500K- 4000K- 5000K	1.10
120CRD-6	6=6" Circular		13/19/27	110	1500/2100/3000		1.21
120CRD-8	8=8" Circular		18/27/36	110	2000/3000/4000		1.46
120CRD-10	10=9.5" Circular		20/30/40	125	2500/3750/5000		1.59

PHOTOMETRY

