

FLUORESCENT



125 SERIES



12597 | ULTRA CHROME




12591 | WHITE



12595 | BLACK †

STANDARD SPECIFICATIONS


Housing	Durable Steel Pan with Conduit Option (Specify Finish)
Lens	Clear Prismatic Polycarbonate
Ballast	(i) 120V 60Hz Magnetic NPF (ii) 120V 60Hz Electronic NPF (iii) 120/277V 50/60Hz Electronic HPF
Lamp(s)	Lamp(s) Included
Certification	Damp Location
Mounting	Ceiling or Wall Mountable

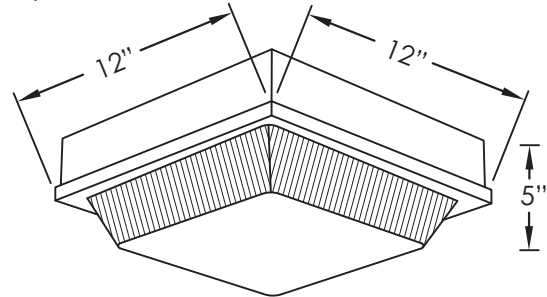

REPLACEMENT PARTS

LENS-1259 | Clear Prismatic Polycarbonate Lens

PRODUCT FAMILY	LENS TYPE	FINISH	WATTAGE	OPTIONS*
125	9			



9 - Clear Prismatic

1 - White

3 - Brushed Rust †

3B - Bronze †

4 - Brushed Verde †

5 - Black †

7 - Ultra Chrome †

8 - Gold Pewter †

9 - Aged Brass †

C - Custom †

- 13GU - (1)13W GU-24 (ii) ALLK NL TP
- 13QE - (1)13W G24Q-1 (ii) ALLK UNV ADV B2 DIM HB NL PL SB SL ULT
- 18GU - (1)18W GU-24 (ii) ALLK NL TP
- 18QE - (1)18W G24Q-2 (ii) ALLK UNV ADV B2 DIM HB NL PL SB SL ULT
- 26QE - (1)26W G24Q-3 (ii) ALLK UNV ADV B2 DIM HB NL PL SB SL ULT
- 32TT - (1)32W GX24Q-3 (ii) ALLK UNV B1 ADV HB NL PL SB SL ULT
- 36QE - (2)18W G24Q-2 (ii) ALLK UNV ADV B2 DIM HB NL PL SB SL ULT
- 39QE - (3)13W G24Q-1 (ii) ALLK UNV ADV B2 DIM HB NL PL SB SL ULT
- 42TT - (1)42W GX24Q-4 (iii) ALLK UNV ADV B1 HB NL PL SB SL ULT
- 52QE - (2)26W G24Q-3 (ii) ALLK UNV ADV B2 DIM HB NL PL SB SL ULT
- 64TT - (2)32W GX24Q-3 (ii) ALLK UNV ADV B1 HB NL PL SB SL ULT
- 84TT - (2)42W GX24Q-4 (iii) ALLK UNV ADV B1 HB NL PL SB SL ULT
- 213GU - (2)13W GU-24 (ii) ALLK NL
- 213QE - (2)13W G24Q-1 (ii) ALLK UNV B2 DIM HB NL PL SB SL
- 226GU - (2)26W GU-24 (ii) ALLK NL
- 313GU - (3)13W GU-24 (ii) ALLK NL
- 313QE - (3)13W G24Q-1 (ii) ALLK UNV B2 DIM HB NL PL SB SL
- 218GU - (2)18W GU-24 (ii) ALLK NL
- 318QE - (3)18W G24Q-2 (ii) ALLK UNV ADV B2 DIM HB NL PL SB SL ULT

OPTION LEGEND

27K	2700 Kelvin Warm White Light Temperature
30K	3000 Kelvin Warm White Light Temperature
35K	3500 Kelvin Medium White Light Temperature
41K	4100 Kelvin Cool White Light Temperature
50K	5000 Kelvin Full Spectrum Light Temperature
65K	6500 Kelvin Daylight Color Temperature
ALLK	Wattage comes in all kelvin above, choose one.
UNV	120-277 Volt Ballast
ADV	Philips Advance Ballast
B1	Integral Battery Backup (CFL Only)
B2	Remote Battery Backup (CFL Only)
B3	6W LED Integral Battery Backup
DIM	Dimming Electronic Ballast
HB	High Power Factor
NL	No Lamp
PE	Photocell (120 Volt Only)
PE2	Photocell (208-277 Volt)
PL	Philips Lamp
SB	Sylvania Ballast
SL	Sylvania Lamp
ULT	ULT (Brand) Ballast

* May not be available in all wattages or combinations, please call factory. † Additional lead time may apply.