

Features

- White Powder Coated Finish
- Mounting Hardware Included
- White Acrylic Diffuser
- Wall or Ceiling Mount
- Minimum Starting Temp -20°F
- UL Listed for Damp Locations
- Dimmable(120V Only)

Applications

- Ceiling or Wall Mount

Wattage/Lumens

120V Integrated System



80 CRI

- 14LED-120 - 14W 1500lm **
- 22LED-120 - 22W 2130lm **
- 32LED-120 - 32W 2750lm **

90 CRI

- 16LED90-120 - 16W 1400lm **
- 24LED90-120 - 24W 2020lm **
- 31LED90-120 - 31W 2550lm **



120/277V Integrated System



80CRI

- 22LMV -22W 1824lm **

E26 Medium Base System


- 2E26 -2 x Medium E26 Base (Max 2x40W) or (2 x 9W LED)



Options

- **B3** - Emergency Back-Up (90 min)
- **OS** - Occupancy Sensor

Dimensions

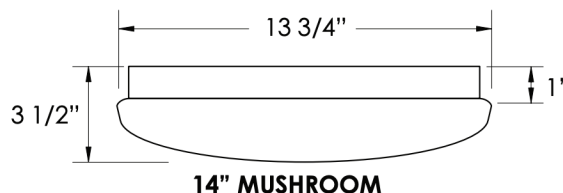

*Emergency Battery Back-Up adds 2" to Depth

Warranty

5 Year Limited Warranty



ORDERING GUIDE

Example: 16411-14LED-120-30K-B3

Family	Lens Color	Base Color	Wattage	CCT	Options
164	1 - White	1 - White	2E26 - 2 x Medium Base	30K - 3000K 40K - 4000K	B3 - Emergency Back-Up OS- Occupancy Sensor
			14LED-120 - 14 Watt 16LED90-120 - 16 Watt 22LED-120 - 22 Watt 22LMV - 22W 120/277V 24LED90-120 - 24 Watt 31LED90-120 - 31 Watt 32LED-120 - 32 Watt		