


INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS




Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

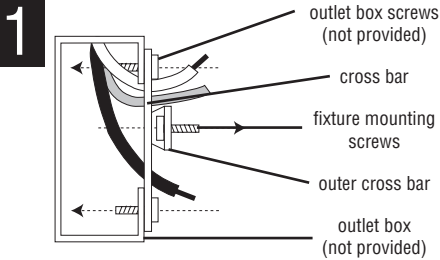


1 THREAD fixture mounting screws (provided) into outer cross bar. ATTACH cross bar to outlet box with outlet box screws (not provided).

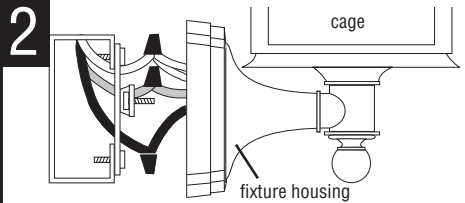


2 CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wires to white supply wire. Do not mix them up. Use wire connectors (not provided). Connect bare fixture ground wire to ground wire from outlet box. NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

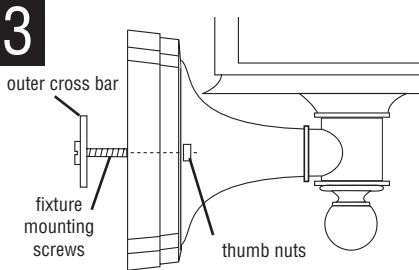


3 POSITION THE FIXTURE HOUSING over the fixture mounting screws and secure in place with the thumb nuts provided.

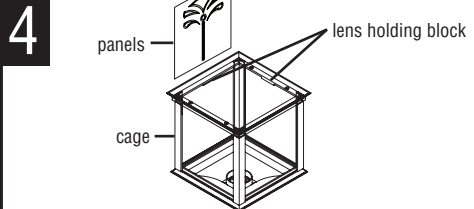

4 INSTALL PLASTIC PANELS, beginning with the panel under the roof hinge area, by sliding panel down cage in slot on inside of cage. Make sure panel is all the way down seated into cage. Tilt panel until top is resting next to lens holding block. Lift lens holding block up away from lens edge and then snap lens into place behind lens holding block.

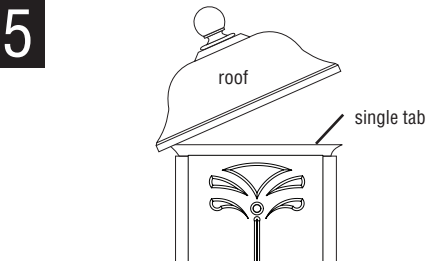

5 SCREW BULB into socket. Be sure to use bulb with wattage no greater than specified on fixture. Then close the roof by snapping into place fitting into the tab on the cage.

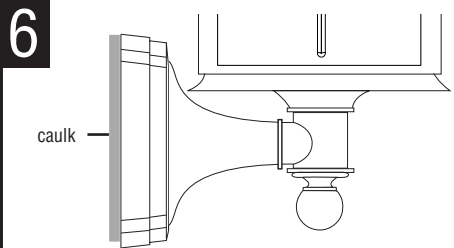

6 NOTE: Fixture MUST be caulked with an acrylic caulk where fixture housing meets mounting surface. This provides a water tight seal when fixture is installed.



CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE LUMINAIRE.

IFR102160