INCON LIGHTING

395 Series

c UL us Wet

FLUORESCENT

39513 | Brushed Rust †

39512 | Brushed Nickel

39518 | Gold Pewter †

Standard Specifications

Housing	Corrosion Resistant Aluminum (Specify Finish)
Lens	White Translucent High Impact Acrylic
Ballast	*(i)* 120V 60Hz Magnetic NPF *(ii)* 120V 60Hz Electronic NPF
Lamp(s)	Lamp(s) Included
Certification	Wet Location Listed
Mounting	Wall Mount
Feature	Open Top & Bottom Design

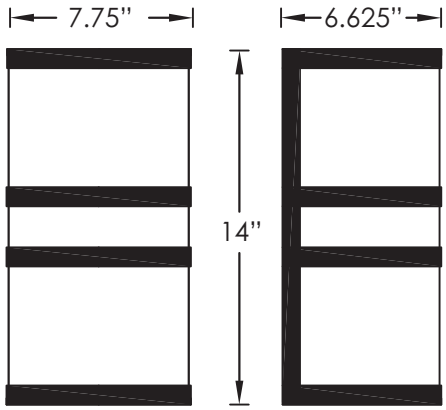

Front Side

Replacement Parts

LENS-393/395 | White Acrylic Lens

Product Family	Lens Type	Finish	Wattage	Options*
395	1			

1 - White

2 - Brushed Nickel

3 - Brushed Rust †

3B - Bronze †

4 - Brushed Verde †

5 - Black †

7 - Ultra Chrome †

8 - Gold Pewter †

9 - Aged Brass †

C - Custom †

13GU -	(1)13W GU-24 (*ii*)	ALLK NL PE
13QE -	(1)13W G24Q-1 (*ii*)	ALLK UNV ADV B2 DIM HB NL PE PE2 PL SB SL ULT
18GU -	(1)18W GU-24 (*ii*)	ALLK NL PE
18QE -	(1)18W G24Q-1 (*ii*)	ALLK UNV ADV B2 DIM HB NL PE PE2 PL SB SL ULT
26GU -	(1)26W GU-24 (*ii*)	ALLK NL PE
26QE -	(1)26W G24Q-3 (*ii*)	ALLK UNV ADV DIM HB NL PE PE2 PL SB SL ULT
32TT -	(1)32W GX24Q-3 (*ii*)	ALLK UNV ADV DIM HB NL PE PE2 PL SB SL ULT
36QE -	(2)18W G24Q-2 (*ii*)	ALLK UNV ADV B2 DIM HB NL PE PE2 PL SB SL ULT
213QE -	(2)13W G24Q-1 (*ii*)	ALLK UNV ADV B2 DIM HB NL PE PE2 PL SB SL ULT

Option Legend

27K	2700 Kelvin Warm White Light Tempurature
30K	3000 Kelvin Warm White Light Tempurature
35K	3500 Kelvin Medium White Light Tempurature
41K	4100 Kelvin Cool White Light Tempurature
50K	5000 Kelvin Full Spectrum Light Tempurature
ALLK	Wattage comes in all kelvin above, choose one.
UNV	120-277 Volt Ballast
ADV	Philips Advance Ballast
B2	Remote Battery Backup (2-Pin & 4-Pin CFL Only)
DIM	Dimming Electronic Ballast
HB	High Power Factor
NL	No Lamp
PE	Photocell (120 Volt Only)
PE2	Photocell (208-277 Volt)
PL	Philips Lamp
SB	Sylvania Ballast
SL	Sylvania Lamp
ULT	ULT Universal Ballast

* May not be available in all wattages or combinations, please call factory.
† Additional lead time may apply.