



754 SERIES

LED




75463B-44LED



75493B-44LED

STANDARD SPECIFICATIONS


Housing	Die-Cast Aluminum
Lens	Clear Tempered Glass
Certification	Wet Location Listed
Mounting	1/2" Threaded Adjustable Knuckle

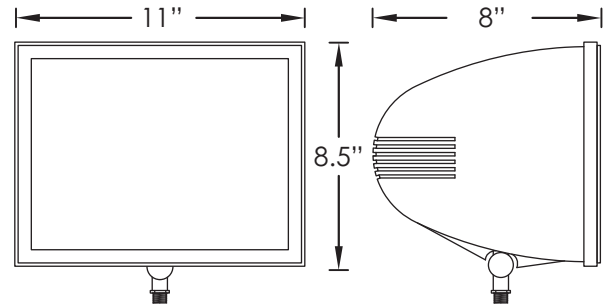

PRODUCT FAMILY	LENS TYPE	FINISH	MODELS	FEATURES & OPTIONS*
754		3B		



- 6 - Prismatic
- 9 - Clear



44LED

120-277V, 50/60Hz Electronic, 0-10 Dimmable
44 Watts, 4900 Lumens, >73CRI
Options: 50K, GS, PTF2, VS, WG

OPTION LEGEND

50K	5000 Kelvin Full Spectrum Light Temperature
GS	Glare Shield
PTF2	Post Top Fitter
VS	Vandal Resistant Polycarbonate Shield
WG	Vandal Resistant Wire Guard

* May not be available in all wattages or combinations, please call factory.