



The Incon nautically inspired 9010AM AmberLED Cypress 9 Curve Bollard provides pedestrian and parking area lighting with a seaside flair. The specially designed UV-stabilized polycarbonate optics offer full-cutoff, excellently controlled uniform lighting designed to replace HID lighting systems for wildlife, dark skies, or security applications requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required for wildlife protection. These fixtures are ideal for a wide range of applications including parking areas, walkways and landscape accents.

Specifications and Features:

Housing:

Durable One-Piece Sand Cast Aluminum Housing Features 1/2" Thick Walls. Includes Flush Mounting Base & Vandal-Resistant Screws, Internal Driver Tray for Easy Maintenance.

Listing & Ratings:

ETL: Listed for Wet Locations, ANSI/UL 1598, 8750
IP65

Finish:

Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens

Mounting Options:

Mounting Kit with 8" Zinc-Plated Anchor Bolts, Included.

AmberLED:

Aluminum Boards

Wattage:

17w: Array 17w, System 18.7w

Driver:


Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.

Dimensions

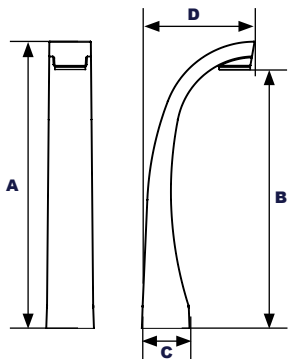

Height (A)	36" (915mm)
Height (B)	32" (824mm)
Base² (C)	6" (155mm)
Width (D)	14 1/4" (362mm)

Project Information:

Project Name:	Fixture Type:
_____	_____
Complete Catalog #:	Date:
_____	_____
Comments:	_____
_____	_____

Certification & Listings:



Ordering Guide:

9010AM	C	1X17	U	AM	C		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
9010AM=AmberLED Curve Bollard, Nautical Series	C=Type III	1X17=17w	U=120-277V	AM=1400K	C=Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens	Z=Bronze B=Black C=Custom (Consult Factory)	SF =Single Fuse* DF =Double Fuse* SP =Surge Protection GF1 =GFCI Outlet, 15A, 120V (Side Mount Only) *120-277V Models Only.


Order Information Example: 9010AMC1X17UAMCZSP

Accessories & Replacement Parts:

**Mounting Accessories
(Order Separately, Field Installed)**

BREBASE* Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all InCon Bollards. Die Cast with Powdercoat Finish, Hardware Included. 1 1/2" Dia. x 1 1/2" H

*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)



BREBASE*

*Shown Mounted

**Replacement Parts
(Order Separately, Field Installed)**


B9LFB Lens Frame, Black Finish

BOADP1 Adapter Plate with Gaskets for Outlet Boxes. Fits InCon Round Bollards. Die Cast with Bronze Powdercoat Finish.



BOADP1

Spectral Chart

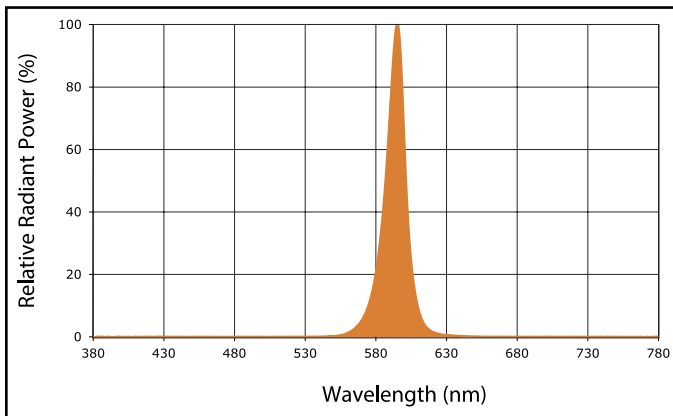

Photometric Performance

LED Board Watts	Input Watts	Optics	Amber LED				
			Lumens	LPW	B	U	G
AmberLED 17w	18.7w	Type III	1040	56	0	1	0

Projected Lumen Maintenance

Data shown for Amber LEDs TM-21-11	Input Watts	Compare to MH				Calculated LED Life
		Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	
L70 Lumen Maintenance @ 25°C / 77°F	18.7w	1.00	0.96	0.92	0.85	196,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.90	0.81	0.62	78,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.96	0.85	0.92	126,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.