




Shown with "SF" Slipfitter Mounting Option.

### Dimensions



<b>Width (D)</b>	9 1/4" (248mm)
<b>Height (A)</b>	11 1/4" (286mm)
<b>Length (B)</b>	6 1/4" (156mm)
<b>Length (B) with Mount</b>	<b>Bracket (BR):</b> 9 1/2" (241mm) <b>Knuckle (KN):</b> 9 3/4" (251mm) <b>Slipfitter (SF):</b> 11 1/8" (283mm)

### Project Information:

<b>Project Name:</b>	<b>Fixture Type:</b>
<b>Complete Catalog #:</b>	<b>Date:</b>
<b>Comments:</b>	

The Incon 9072C3 ColorLED Traveler 3C3 static color cut-off wall mounted or flood light luminaire is available with optional knuckle, slipfitter and bracket mounting features and in two wattages designed to provide accent colored light using Blue, Green, or Red COB LEDs. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting can be accomplished using ground attachment accessories and to heights of 20 feet based on light level and uniformity requirements.

### Specifications and Features:

#### Housing:

Die-Cast Gasketed Aluminum Housing. Includes Cast-In Box Template and Built in Level. White Reflector Nickel-Plated Stainless Steel Hardware.

#### Listing & Ratings:

ETL: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

#### Finish:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating.  
Custom Colors Available Upon Request.

#### Lens:

Tempered Clear Flat Glass Lens.

#### Mounting Options:

Mount Directly Over Recessed Electrical Box or Use 1/2" Surface Mount Conduit. Heavy-Duty Adjustable Knuckle, Slipfitter, or Two-Piece Swivel Bracket, Sold Separately, Field Installed.

#### COB LED:

ColorLED COB

#### Wattage:

60w COB: 60w, System: 56w; (250w HID Equivalent)  
80w COB: 80w, System: 80w; (400w HID Equivalent)

#### Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

#### Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available. Please Consult Factory. Fixtures are Tested with InCon Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

#### Warranty:

5-Year Warranty for -40°C to +50°C Environment.

**Shipped from Tampa location only**

### Certification & Listings:



**Ordering Guide:**



Shipped from Tampa location only.

## 9072C3


Model	Wattage	Driver	CCT	Color	Mounting	Options
9072C3=Large LED Traveler 3C3 Wall and Flood Light	4X15=60w 4X20=80w	U=120-277V	BL=Blue GR=Green RD=Red	Z=Bronze C=Custom (Consult Factory)	KN=1/2" NPS Knuckle, SF=Slipfitter BR=Two-Piece Swivel Bracket  *All Mounts Are Field Installed.	SF=Single Fuse* DF=Double Fuse* SP=Surge Protection P14=Pencil Photocell, 120-277VAC *120-277V Models Only.

Order Information Example: 9072C34X20UBLKZKNSP


**Accessories & Replacement Parts:**

Mounting Accessories (Order Separately, Field Installed)	Accessories (Order Separately, Field Installed)	Replacement Parts (Order Separately, Field Installed)
<p>FLPTFZ Die-cast Post Top Fitter for 2 3/8" to 3 1/2" Poles, Bronze Powdercoat Finish, Three (3) 1/2" Coin Plugs.</p> <p>FLSTK Heavy Duty Ground Stake, Built-in Wiring Compartment with 1/2" NPS Threaded Fitting, Black Plastic.</p> <p>FLSTZ Die-Cast Adjustable Knuckle with 1/2" NPS Threads, Bronze Powdercoat Finish.</p> <p>FL73SFZX External Mount Die-Cast Adjustable Slipfitter for 2 3/8" Tenons, Bronze Powdercoat Finish, Includes Hardware.</p> <p>FL73BRZ Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.</p>	<p>P18112 208-277V, 240VAC Pencil Photocell</p>  <p>P18112</p>	<p>P18114 120-277V, 50/60Hz Pencil Photocell</p>  <p>P18114</p>
 <p>FLPTFZ FLSTK FLSTZ* FL73SFZX* FL73BRZ*</p> <p>*Shown Mounted</p>		

**Distributions**

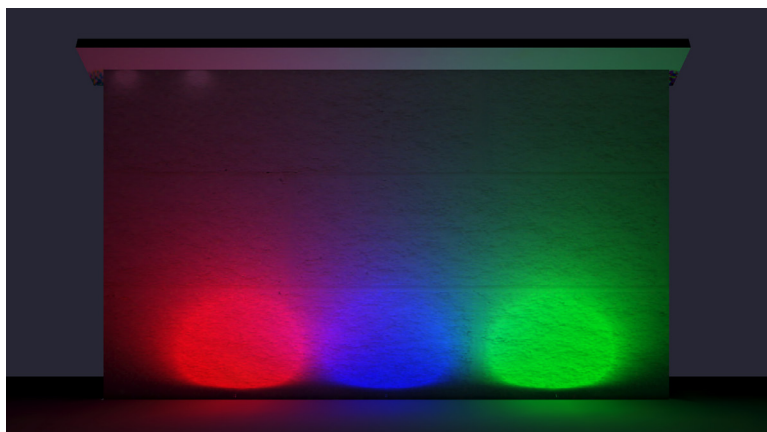

**Ground Mount Flood**

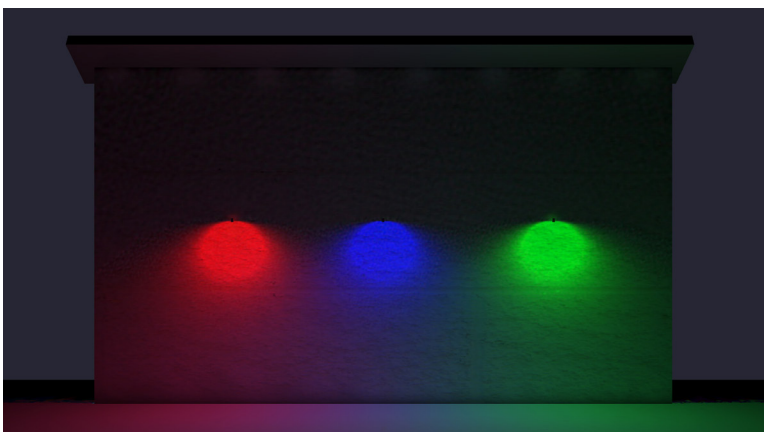

**Wall Mount Cutoff**

LED COB Watts	Input Watts	Flood Beam	Wall Mount
COB LED 60w	56	105°H x 90°V, NEMA 7H x 7V	Type III
COB LED 80w	80	100°H x 80°V, NEMA 7H x 7V	Type II