




ITEM NO.	PART NUMBER	DESCRIPTION	DESCRIPTION 2	QTY.
1	POLE	-	-	1
2	TEN-0001	TENON 2-3/8"	-	1
3	COV-0001	HAND-HOLE COVER	2.5" x 5"	1

REVISIONS				
ECO	REV.	DESCRIPTION	DATE	INITIALS

FEATURE ORIENTATIONS				
	0°	90°	180°	270°
CABLE ENTRY	X			
HAND HOLE	X			



**NOTE:** ALL HOLES DRILLED ONLY THROUGH THE  
FACES SPECIFIED BY 'X'

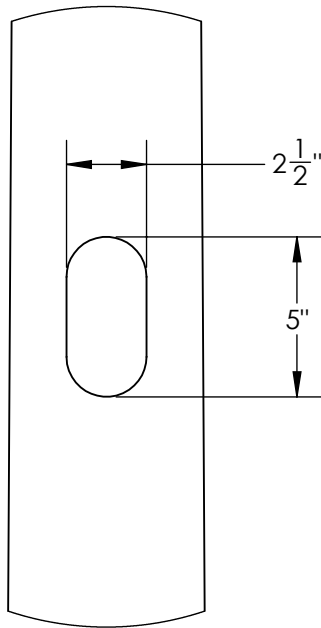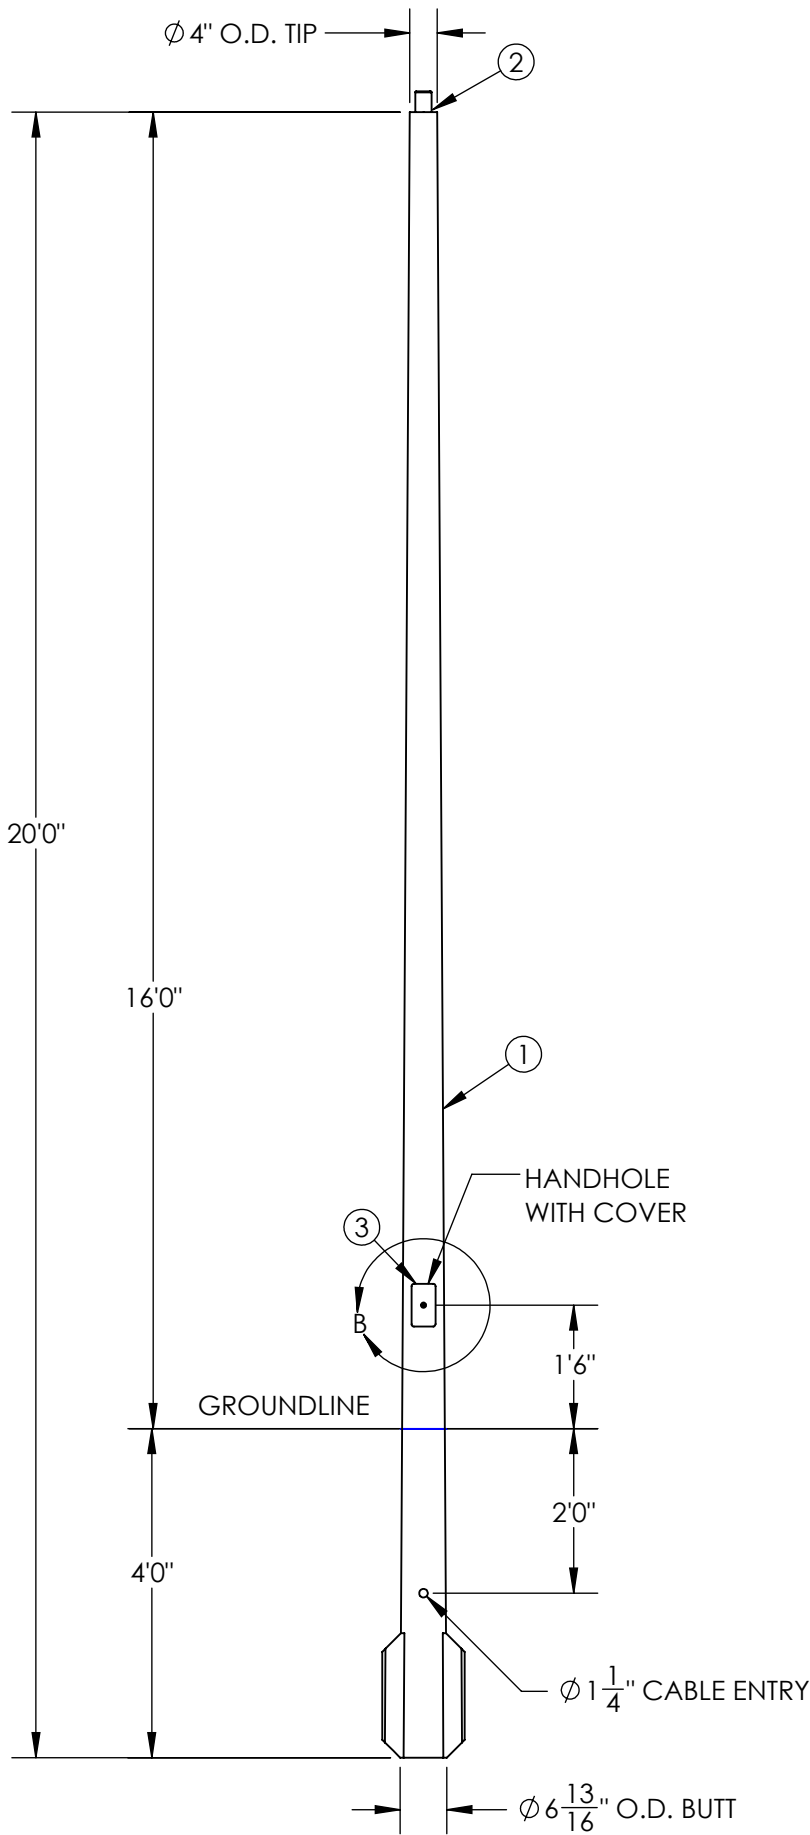

DETAIL B  
HANDHOLE CUTOUT  
COVER REMOVED FOR CLARITY  
SCALE 1 : 6

NOTES:



1. DIRECT BURIAL CLASS 1 POLE PER ASTM 4923. POLE TOP DEFLECTION SHALL NOT EXCEED 15% OF THE ABOVE HEIGHT AT MAX WIND LOADING AND MAX FIXTURE WEIGHT.
2. DESIGN CRITERIA PER AASHTO LTS-6-2013, ANSI C136.20-2012, AND 2020 FBC 7TH EDITION WHERE APPLICABLE, WITH A MINIMUM SAFETY FACTOR OF 1.5.
3. EMBEDMENT BASED ON MINIMUM DEPTH RECOMMENDED BY ANSI C136.20-2012 SECTION 5.3 AND ASSUMING CLASS 2 SOIL OR BETTER WHEN LOADED AT MAXIMUM EPA.

MAXIMUM EPA PER WINDZONE										
MPH	90	100	110	120	130	140	150	160	170	180
EPA	8.8	6.5	4.8	3.5	2.7	2.6	2.1	1.7	1.4	1.2

N	=	NATURAL FINISH
S	=	SMOOTH FINISH

D4TS20F00↑2↓GXHH

G	=	GRAY
A	=	BLACK
F	=	BRONZE
W	=	WHITE
N	=	GREEN

<b>---UNLESS OTHERWISE SPECIFIED---</b> DIMENSION UNITS ARE IN FEET AND INCHES DIMENSIONS SHOWN ARE NOMINAL		STATE: RELEASED 2022-05-17 DRAWN: AJH 2022-05-17 CHECKED: DMF 2022-05-17 APPROVED: AJH 2022-05-17 REPLACES: -			
<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INCON. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INCON IS PROHIBITED.		THIRD ANGLE PROJECTION 		DESCRIPTION: <b>POLE SYSTEM, DIRECT BURIAL          STANDARD DUTY, 20FT</b>	
CUSTOMER SIGNATURE:		DATE:		SIZE: DWG. NO. <b>B IN-D4TS20F00X2XGXHH</b>	
				POLE COLOR: REV: SHEET 1 OF 1	