

Spatial Art Series 3D Printed Pendants SPA3D-P-7059

USA BASED LEADING EDGE TECHNOLOGY

USA based 3D Printing uses leading edge Additive Manufacturing to produce the pendant shades with minimal energy consumption. 3D printers create parts using fused deposition modeling (FDM) technology to build the design in continuous layers.


Features

- State-of-the-art 3D printing technology
- Stylish, eco-friendly crafted using recyclable materials
- Shades are printed with PLA Thermoplastic Polyester
- 13 Standard colors options and 75+ custom color available
- Tailor the design to fit your personal style
- Build your brand through custom logo printing options
- Suitable for damp locations.

Typical Applications

- Retail Centers
- Restaurants & Lounges
- Industrial Parks
- Schools and Universities
- Public Transit
- Airports
- Office Buildings
- Medical Facilities

Mounting Heights

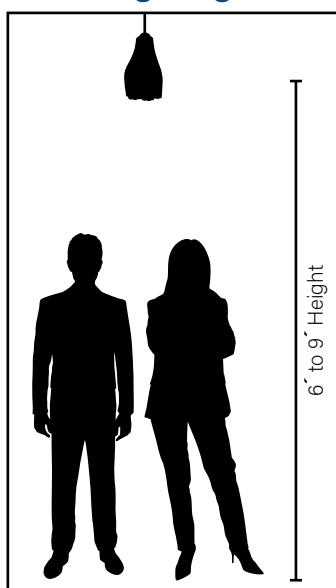

Certifications and Listings



SPA3D-P-7059 shown with black cord and blue gray opaque shade

Standard Colors



Spatial Series 3D Printed Pendants

SPA3D-P-7059



ORDERING GUIDE

1 FIXTURE

SPA3D-P-7059

Model

SPA3D-P-7059 = 7059 Spatial 3D Printed LED Pendant

2 COLOR

Cord Type and Color	Canopy	Shade Color (See Color Chart)
CRW = Cord - White Smooth* CRB = Cord - Black Smooth* * Standard 8 FT Length	FW = Flat Disc White FB = Flat Disc Black FF = Flat Disc Fixture Finish** CW = Cone White CB = Cone Black CF = Cone Fixture Finish** **Opaque Finish Only	WH = White Opaque BK = Black Opaque GY = Gray Opaque BR = Brass Opaque BZ = Bronze Opaque LA = Latte Opaque BG = Blue Gray Opaque PK = Pink Opaque CL = Clear Translucent GP = Graphite Translucent RS = Rose Translucent OL = Olive Translucent CF = Coffee Translucent PC = Premium Color (Consult Factory)

3 LAMP

Lamp Type/CCT/Watts/Lumens
(BLANK) = No lamp with E26 Medium Base Socket (LED Medium Base Lamps Only 15W MAX) CC1 = ST-19 Clear Filament RGB Color and Tunable White (2700-5000K CCT), 6W, (450 Lumens) ^{1,2} CS1 = A-19 White CCT selectable (2700K, 3000K, 3500K, 4000K, 5000K, 8.8W, (800 Lumens) ³ CV1 = ST-19 Clear Vintage Filament 4000K CCT, 8W, (800 Lumens) ³ CV2 = ST-19 Clear Vintage Filament 3000K CCT, 8W, (800 Lumens) ³ CV3 = ST-19 Clear Vintage Filament 2200K CCT, 2W, (80 Lumens) ³ Notes 1. Medium Base LED Lamp 2. Requires Satco STARFISH APP to operate. 3. Medium Base Dimmable LED Lamp.

SAMPLE CATALOG NUMBER: SPA3D-P-7059-CRW-FW-CL-CC1

Product Specifications

SHADES:

Opaque shades are printed with PLA Thermoplastic Polyester for opaque shades and PETG Synthetic Thermoplastic Polyester for translucent shades.

SHADE COLORS:

All shade designs are available in any of the standard colors shown below. Custom colors are available with possible extended lead times and additional costs. Please consult factory

CORD AND SOCKET:

Medium E26 white or black phenolic socket with shoulder and ring, pre-wired white 18/3 SVT 8ft with Leads. 120V ONLY.

MOUNTING:

Mounting Hardware includes UL listed junction box cover plate with cord restraint clamp. Refer to installation Guidance for mounting.

LED LAMP:

Optional lamp is available in 2200K, 2700K, 3000K, 3500K, and 4000K and 5000K CCT. Color changing and white light tunable lamp is available. See page 4 for details and specs. Customer supplied lamps must be LED and not exceed 15w.

ENVIRONMENT:

Suited for 25° Celsius ambient. Suitable for damp locations.

COMPLIANCE:

Components including cord, socket, and mounting hardware are UL recognized, and luminaires are ETL cULus listed for 25° C ambient environments. Damp Location Listed. Filament material is UL certified. Not for installations in locations where the fixture potentially will be subject to impacts from external sources.




WARRANTY:

Shades - 5 Years
Lamp - Refer To Lamp Manufacturer Warranty

Spatial Series 3D Printed Pendants



SPA3D-P-7059

DIMENSIONS

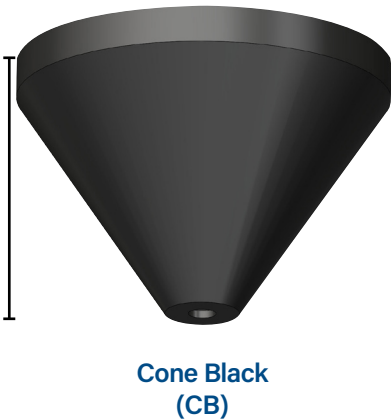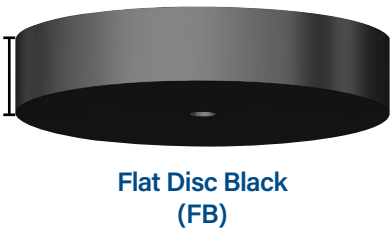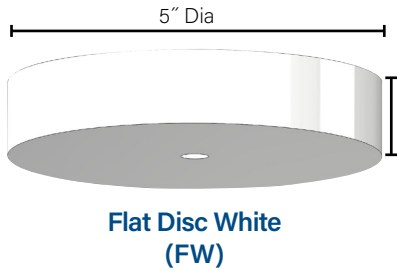


STANDARD COLORS

Opaque



Translucent



Additional Custom Colors Available
Opaque and Translucent

Spatial Series 3D Printed Pendants

SPA3D-P-7059



LAMPS



CC1

ST-19 Clear Filament RGB Color and Tunable White (2700-5000K CCT), 6W, Medium Base LED Lamp (450 Lumens) Requires Satco STARFISH APP to operate



CS1

A-19 White CCT selectable (2700K, 3000K, 3500K, 4000K, 5000K, 8.8W, Medium Base Dimmable LED Lamp (800 Lumens)



CV1

ST-19 Clear Vintage Filament 4000K CCT, 8W, Medium Base Dimmable LED Lamp (800 Lumens)



CV2

ST-19 Clear Vintage Filament 3000K CCT, 8W, Medium Base Dimmable LED Lamp (800 Lumens)



CV3

ST-19 Clear Vintage Filament 2200K CCT, 2W, Medium Base Dimmable LED Lamp (80 Lumens)

Specifications

- Lamps are Dimmable 120V, 60Hz, 0.7-0.75 PF, -20C-40C operating temperature
- Medium Base for ANSI E26 socket
- Lamps are shipped in original manufacture packaging with pendant lights in carton. Refer to lamp manufacturers website for warranty.

Compliance

- cULus Damp Location
- California Title 20 and Title 24
- RoHS and FCC Compliant



Logo Branding



Pendant 2105
Color 11600

Custom Logos Available

Logos can be digitized and printed to become an integral part of the fixture design. These can be contrasting color or raised relief in the same color.

Logo Highlights

- Full Color Logo
- 2 or 4 Sides
- Aesthetic Illumination
- Powerful Branding

(Contact Factory for Details)