



INCON
LIGHTING


TEXTURED STREETLAMP GLOBES

MATERIALS

- **Polycarbonate** - UV stabilized with continuous operating temperature of 100°C to 125°C and high impact resistance down to -40°C, transmittance of 88% (application dependent). Polycarbonate streetlamps are available in clear.
- **Acrylic** - Impact modified and UV resistant with continuous operating temperature up to 80°C. Maximum transmittance of 92% (clear). Acrylic streetlamps are available in clear.
- **LD Acrylic** - Impact modified and UV resistant with continuous operating temperature up to 80°C and transmittance of 90% to 94% (application dependent). Minimum order quantities apply.



FITTER NECK (F)

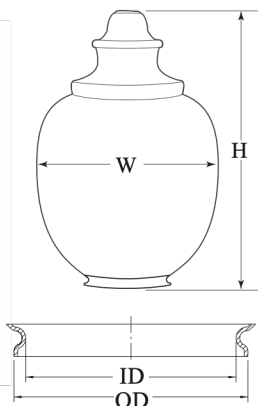


ITEM NO.	HEIGHT	WIDTH	ID (NECK)	OD (NECK)	MATERIAL	COLOR
LENS-8729A*	25.19"	16.50"	7.13"	8.00"	Acrylic	Clear
LENS-8726	25.19"	16.50"	7.13"	8.00"	LD Acrylic	Frost
LENS-8729	25.19"	16.50"	7.13"	8.00"	Polycarbonate	Clear

*Minimum order quantities apply.

OPTIONAL ACCESSORIES

Finial



99-FINIAL

Aluminum Top



98-ATOP-WASH
(Use w/62 Series)

Internal Heat Shield



96108-A

Dimensions are nominal