

SELECT


Brando Series PF100

DESCRIPTION

The PF100 is crafted from cast aluminum and finished with a premium black powder coat, it withstands the elements effortlessly. Engineered to fit an 8" lip globe or acorn diffuser, this fitter features a range of functional components including a ballast, capacitor, and igniter compartment, along with hex set screws for secure installation (included). Ideal for 3" poles in wet locations when paired with a suitable diffuser.

FEATURES

- Cast Aluminum Housing
- Stamped Aluminum Plate
- Ballast, Capacitor, & Igniter Compartment
- Hex Set Screws (*hex wrench included*)
- Accommodates 8" Globes (*sold separately*)
- Pulse rated 4KV Medium E26 or 5KV Mogul E39 Base Porcelain Socket
- Accommodates 3" Poles
- Listed for Wet Locations with Suitable Diffuser

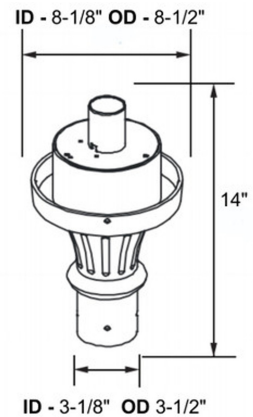

WATTAGE/LUMENS

E26 Medium Base

- E26 Medium Base (*Lamp Sold Separately*)

E39 Mogul Base

- E39 Medium Base (*Lamp Sold Separately*)

ORDERING GUIDE (Sample: PF10005-E26)

Family	Lens Color	BASE COLOR	Wattage	CCT	Options
PF100	0 - No Lens	5 - Black	E26 - Medium Base		
			E39 - Mogul Base		

Specifications subject to change without notice

FEATURES



PROJECT:

SCHEDULE:

DATE:

PREPARED BY:

NOTES:

ADDITIONAL NOTES

- Do not mount on post or pole that results in a vertical rise of 25ft or higher.