

SELECT


Brando Series PF2000

DESCRIPTION

The PF2000 is crafted from cast aluminum and finished with a premium black powder coat, it withstands the elements effortlessly. Engineered to fit an 8" lip globe or acorn diffuser, this fitter features a range of functional components including a ballast, capacitor, and igniter compartment, along with hex set screws for secure installation (included). Ideal for 3" poles in wet locations when paired with a suitable diffuser.

FEATURES

- Cast Aluminum Housing
- Stamped Aluminum Plate
- Gasket for Weather-tight seal
- Ballast, Capacitor, & Igniter Compartment
- Hex Set Screws (*hex wrench included*)
- Accommodates 8" Lip Necked Globes (*sold separately*)
- Pulse rated 4KV Medium E26 and 5KV Mogul E39 Base Porcelain Socket
- Accommodates 3" Poles
- Listed for Wet Locations with Suitable Diffuser

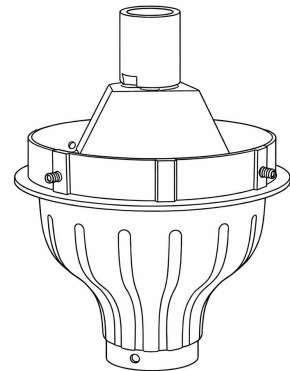

PROJECT: _____

SCHEDULE: _____

DATE: _____

PREPARED BY: _____

NOTES: _____

WATTAGE/LUMENS

E26 Medium Base

- E26 Medium Base (*Lamp Sold Separately*)

E39 Mogul Base

- E39 Medium Base (*Lamp Sold Separately*)

ORDERING GUIDE (Sample: PF20005)

Family	Lens Color	BASE COLOR	Wattage	CCT	Options
PF200	0 - No Lens	5 - Black	Leave Blank - E26-E39 (Med & Mogul Base)		

Specifications subject to change without notice

FEATURES



ADDITIONAL NOTES

- Do not mount on post or pole that results in a vertical rise of 25ft or higher.