




# INSTALLATION INSTRUCTIONS




**WARNING:** Be sure the electricity to the wires you are working on is turned **OFF** or remove the fuse or turn **OFF** the circuit breaker.

## Assembly & Installation


### ASSEMBLY

Optional Finial

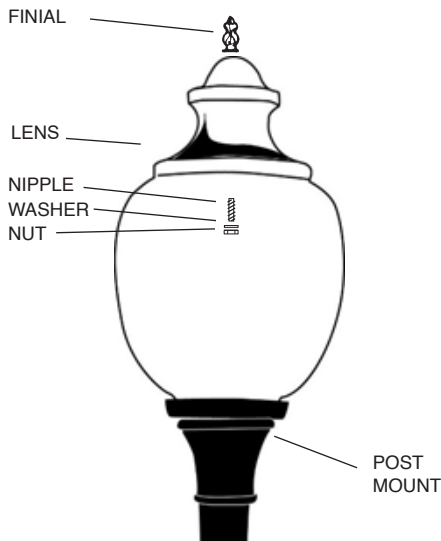

1. ATTACH FINIAL TO LENS WITH NIPPLE, WASHER AND NUT.
2. ATTACH LENS TO POST MOUNT FITTER.

FIXTURE

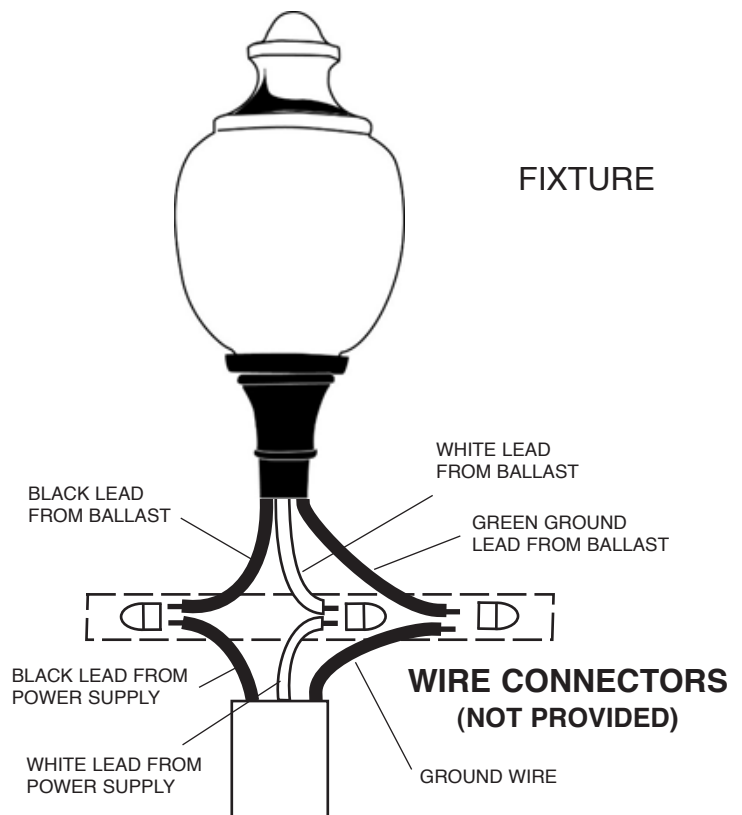

1. Place the black wire from the ballast evenly against the black wire from the power supply and twist together the bare metal.
2. Fit a wire connector (Not Supplied) over the twisted wires and screw clockwise until you feel a firm connection.
3. Try gently to pull the connector off the wires. If you can pull the connector off, carefully re-do steps 2 and 3 above and check again for a firm connection.
4. Connect the white wire from the fixture to the white wire from the power supply following steps 2 and 3 and check for a firm connection.
5. Grounding Instructions: Connect the ground wire from the outlet box to the ground wire extending from the fixture. Never Connect the ground wire to the black or white power supply wires. Note: All fixtures do not have Ground wires.
6. Conceal the connected wires within the post. Keep the black and white apart.
7. Slide fixture over the post top.
8. Insert bulb into socket. Set globe/acorn completely into fitter and secure with three set screws.



CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE LUMINAIRE.