



The Incon 9077AM AmberLED Marcos VP55 garage luminaire with optional integral sensor is available in two wattages with an IES Type V distribution designed to replace HID lighting systems up to 175w MH or HPS for wildlife, dark skies, or security applications requiring monochromatic AMBER light. LEDs operate between 585 and 595nm, greater than 560nm required for wildlife protection. Typical parking garage applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 14 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Low Profile Die Cast Aluminum Housing, 1/2" Coin Plugs with O-rings for Conduit or External Sensor. Built-in Sensor Housing with Color-Matched UV-Stabilized Polycarbonate Cover. A Clear Cover will be Provided When a Sensor is Ordered.

Listing & Ratings:

ETL: Listed for Wet Locations, ANSI/UL 1598, 8750.
(Damp Locations When Used with V.N.Q.M.) IP66 Sealed LED Compartment.

Finish:

Textured Architectural Bronze or White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Molded UV-Stabilized Acrylic Optical Lens Designed for Garage Lighting Applications.

Mounting Options:

Included Easy-Hang Bracket Fits Standard 4" Electrical Box, Allowing One-Person Installation. Optional Quick-Mount/Pendant Bracket Available.

AmberLED:

Aluminum Boards

Wattage:

39w: Array: 39w, System: 43.4w;
52w: Array: 52w, System: 57.2w; (Up to 175w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:


Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with InCon Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.

Dimensions

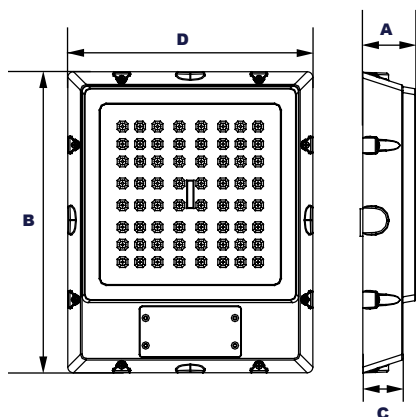

Width (D)	11 1/4" (285mm)
Length (B)	13 3/4" (350mm)
Height 1 (A)	2 1/2" (65mm)
Height 2 (C)	1 1/8" (47mm)

Project Information:

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

Certification & Listings:





Ordering Guide:

9077AM	F	U	AM			
Model	Optics	Wattage	Driver	CCT	Color	Options
9077AM= AmberLED Marcos VP55 Garage Lighter	F=Type V	1X39=39w 1X52=52w	U=120-277V	AM=1400K	W=White Z=Bronze C=Custom (Consult Factory)	SF =Single Fuse* DF =Double Fuse* SP =Surge Protection PC3 =Photocell, 120-277VAC S2 =Microwave Sensor with Dimming for Mounting Heights of 8' to 40'.* S4 =Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19'.* QM =Quick Mount/Pendant Mount BU =Battery Backup, 90 Minutes* BUC =Cold Start Battery Backup, -20°C, 90 Minutes*


*120-277V Models Only.

Order Information Example: 9077AMF1X52UAMZSP

Accessories & Replacement Parts:


Accessories (Order Separately, Field Installed)	Replacement Parts (Order Separately, Field Installed)
VN55BF* Baffle, Aluminum with Powdercoat Finish *Specify Color: Z=Bronze, W=White, C=Custom (Consult Factory)	VNQM Hinged Quick-Mount Bracket, Stamped Steel, Mount Over Recessed Electrical Box, or Use 3/4" NPS Downrod for Pendant Mounting. ETL Listed for Damp Location Mounting.
 VN55BF* *Shown Mounted	P18103 120-277VAC Photocell
	P17117 Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz.
	P17123 Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz
	For Replacement Battery Backup, see the InCon LED Battery Backup Specification Sheet.
	 VNQM P18103 P17117 P17123

Photometric Data

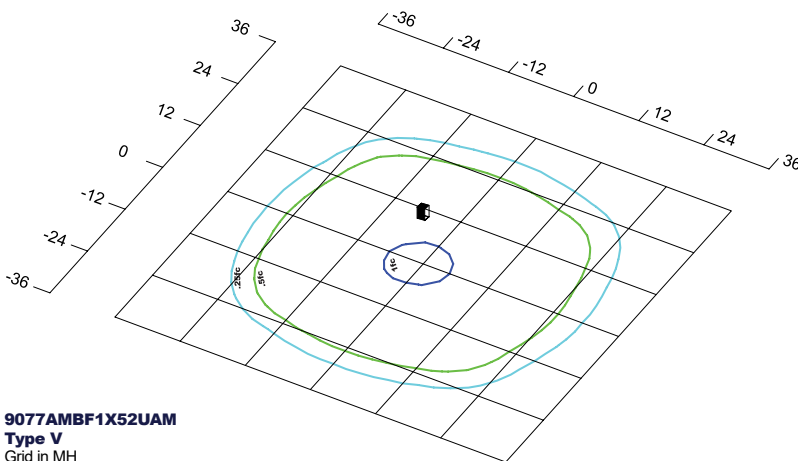

9077AMBF1X52UAM
Type V
 Grid in MH
 MH=12 Feet

Spectral Chart

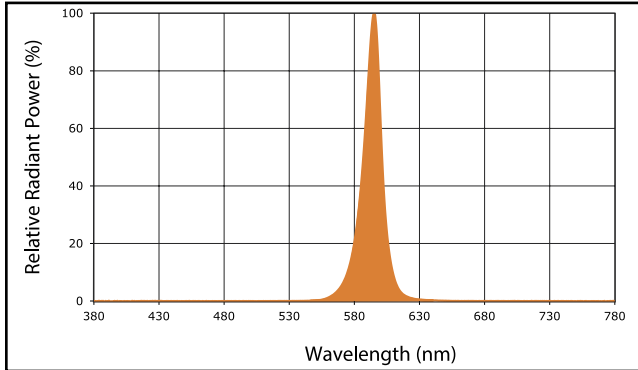

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Amber LEDs				
				Lumens	LPW	B	U	G
AmberLED 39w	117	43	Type V	1,877	43	1	1	0
AmberLED 52w	117	57	Type V	2,292	40	2	2	1

Projected Lumen Maintenance

Data shown for Amber LEDs		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 57w	1.00	0.97	0.93	0.86	219,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.96	0.91	0.82	114,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.95	0.89	0.78	93,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.